


Components



T-rail




Rail Splice



Mid Clamp



End Clamp



Rail nut kits



PAT leg




Expand bolt

Advantage

- Unique transfer kit design on PAT legs, stronger support ability
- Pre-assembled PAT legs for easy and quick to install
- Easy and flexibility to used on flat metal sheet roof
- Universal mid and end clamp for 30 to 40 mm thickness modules
- Flexibility for long or shot rows arrays

Unique Feature

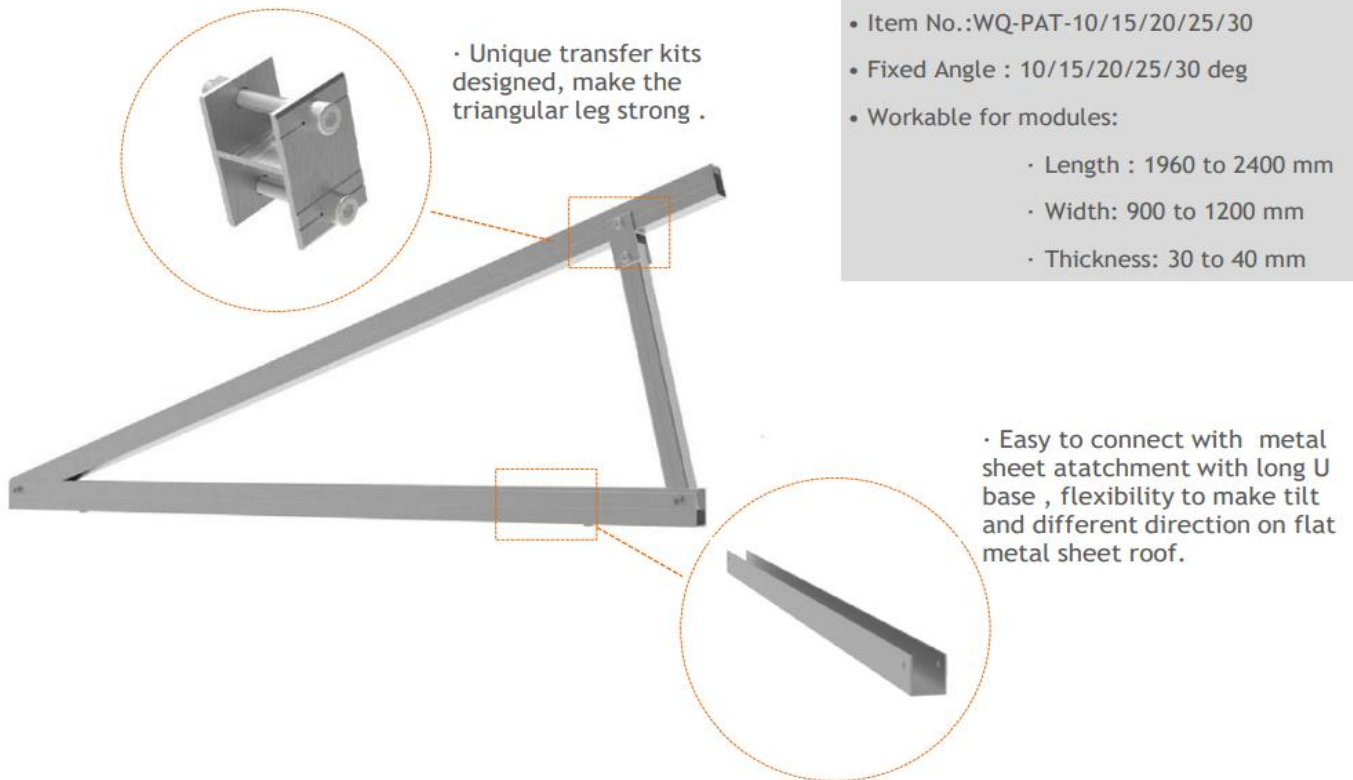

- Item No.:WQ-PAT-10/15/20/25/30
- Fixed Angle : 10/15/20/25/30 deg
- Workable for modules:
 - Length : 1960 to 2400 mm
 - Width: 900 to 1200 mm
 - Thickness: 30 to 40 mm

Technical Data

Product name	PAT Mount System
Application	Flat metal sheet and flat concrete concrete roof
Inclination	Fixed 10/15/20/25/30 deg or customized
Material	Aluminum 6005 T5
Finish	Anodized clear, average 12um
PV module	Framed
Module size	Small and Big modules
Module orientation	Portrait and landscape
Module direction	South , North